integral LED

Fiche Technique Du Produit

CANDLE BULB E14 470LM 4.9W 4000K NON-DIMM 250 BEAM FROSTED INTEGRAL

ILCANDE14NE088



This 4.9W retro-fit Integral LED Candle (frosted finish, small screw, white base) delivers a warm light and brightness, similar to a 40W filament bulb. It features high output LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

Details

Code de commande rapide:	833367
Code-Barre:	5055788272526
Catégorie:	Ampoules
Nom de la gamme:	Everyday
Type de produit:	Bougie
Segment de marché:	Intérieur commercial, intérieur résidentiel
Garantie (années):	2
CE RoHS:	Oui

Physical Data

Longueur du produit (mm):	102
Largeur du produit (mm):	35
Poids du produit (g):	20
Matériau:	Aluminium, plastique
Terme de base:	Petit culot Edison
Type de culot:	E14
Construction:	Dissipateur thermique en aluminium et plastique, diffuseur moulé par injection
Finition de l'ampoule:	Opale
Type d'ampoule:	Flamme
Forme de l'ampoule ou du luminaire:	ovale
Emplacement / Application:	Utilisation intérieure, éclairage général

Electrical Data

Puissance (W):	4.9
Puissance consommée (W):	4.9
Facteur de puissance:	0.4


Puissance équivalente (W):	40
Ampérage (mA):	45
Variation:	Non-dimmable
Alimentation incluse:	Oui
Courant électrique:	AC
FR:	EN-62560
Certifié LVD:	Oui


Light Data

Flux lumineux en Lumens (lm):	470
Efficacité lumineuse (lm/W):	96
Température de couleur corrélée (CCT) (K):	4000
Température de couleur:	4000K - Blanc Froid
Nom de la température de couleur:	Blanc froid
Angle d'éclairage:	250
Indice de Rendu des Couleurs (IRC):	80
Gamme de fréquences (Hz):	50/60
Allumage instantané (moins d'une seconde):	Oui
Type de LED:	Composant pour montage en surface(SMD)
Durée de vie (heures):	15000
Cycles d'allumage:	7500

Environment

FR:	EN-62560
Certifié LVD:	Oui
CE RoHS:	Oui
Notation énergétique:	A+
New Energy Rating:	F
Hg 0% (sans mercure):	Oui
Indice de Protection IP:	IP20
Température minimale (°C):	-20
Température maximale (°C):	40

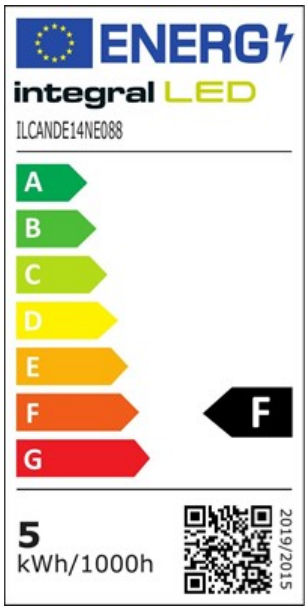

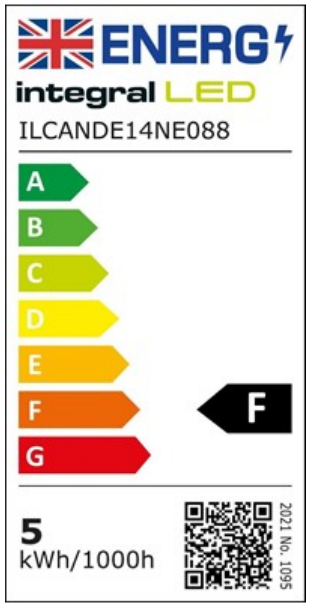

Packaging

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

	45
Poid du colis (g):	110
Longeur du colis (mm):	50
Largeur du colis (mm):	50
Epaisseur du colis (mm):	2880
Qté par palette EURO:	



Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE